


## Riley Multiclean 2-120 Ultrasonic Wash & Ultrasonic Rinse

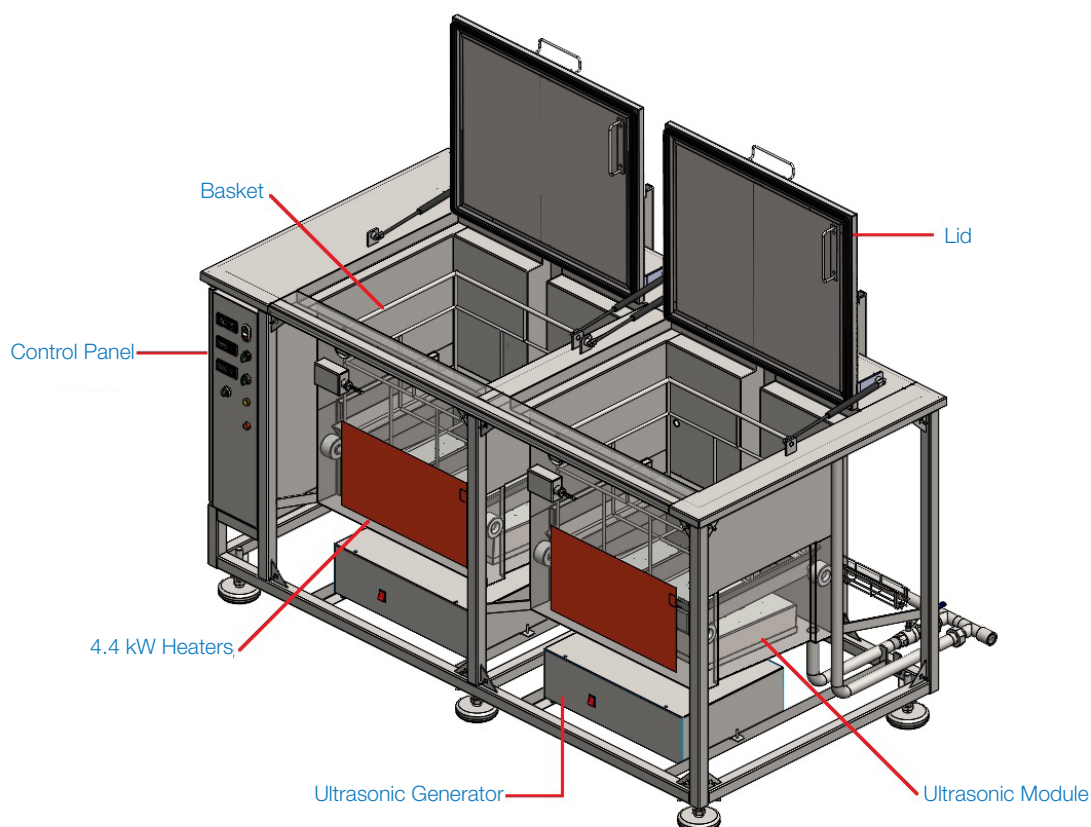


- 2 stage (wash & rinse).
- 120 litre tanks.
- Fully Stainless Steel - quality and durability for an extended lifespan.
- Ultrasonic Cleaning Stage - 28kHz ultrasonic transducers are mounted on the base of the wash tank vibrate to remove even the finest of particles from the most difficult to get to places.
- Rinse Stage - Wash away cleaning chemical residuals.
- Up to 80°C heated tanks further improve cleaning & rinse performance
- Basket Agitation aid cleaning and rinse performance
- Insulated - energy savings
- 20mm thick thermal insulation installed on all heated fluid to lower energy consumption
- Extended 24 months parts guarantee comes with each new machine. 12 Months labour cover is also included.

### Controls

An easy-to-use IP54 rated machine mounted control panel comes complete with the following control features:

Fluid heaters on/off, Fluid temperature controllers, Ultrasonic washing timer controller, Rinsing timer controller, Low fluid level indicator light, Mains power on light

## Riley Multiclean 2-120 Ultrasonic Wash & Ultrasonic Rinse

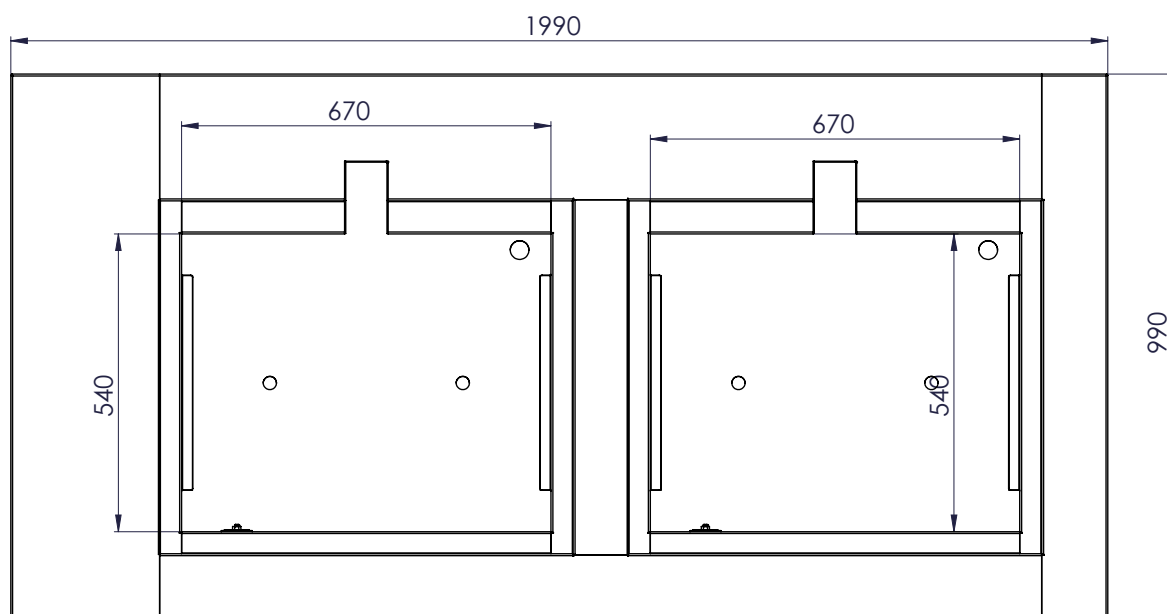

mm. Not to scale

- |          |  |
|----------|--|
| Tank 1   | 670mm width x 540mm depth x 540mm height<br>2mm ANSI 304 Stainless Steel<br>Ultrasonic 1250W Floor Mounted Transducer, 28kHz<br>Electric Heaters up to 80°C, 4.4kW<br>Basket Agitation with pneumatic cylinder |
| Tank 2   | 670mm width x 540mm depth x 540mm height<br>2mm ANSI 304 Stainless Steel<br>Ultrasonic 1250W Floor Mounted Transducer, 28kHz<br>Electric Heaters up to 80°C, 4.4kW<br>Basket Agitation with pneumatic cylinder |
| Basket   | Stainless Steel<br>560mm width x 450mm depth x 350mm height  |
| Electric | Three phase + neutral + earth, 380-400 volts, 50Hz   |
| Water    | Inlet: 1x ½" BSP manual ball valves<br>Outlet: 2x 1" BSP manual ball valves  |